



建峰索具有限公司
Jian Feng Sling Co., Ltd

地址：广州市经济技术开发区永和区永顺大道贤堂路18号
邮编：511356

国内销售 电话：020 3222 2868
传真：020 3222 2166

国际销售 电话：+86 20 3222 2170
传真：+86 20 3222 2053

Address: No.18 Xiantang Road, Yongshun Dadao,
Yonghe District, Guangzhou Economic
and Technological Development Zone,
Guangzhou, Guangdong, China 511356

Tel : +86 20 3222 2170
Fax : +86 20 3222 2053

Email: info@jian-feng.com
www.jian-feng.com



装带
SYNTHETIC FIBER SLINGS

绑带
TIE DOWNS

金配件
HARDWARE

JIAN FENG

SYNTHETIC LIFTING AND LASHING

建峰吊装带



建峰吊装带 JIAN FENG SYNTHETIC LIFTING AND LASHING

建峰公司创建于1982年，是一家专业研发、生产与销售索具的大型企业，也是享誉国内和国际市场的大型索具企业集团。产品涵盖钢丝绳、钢丝绳索具、链条索具、索具五金配件、起重工具、吊装带、捆绑带及配件等。

凭借“建峰”品牌在行业内近四十多年的专心经营和不断创新，公司发展迅速，产口已出口到欧洲、澳洲、南美、日本东南亚、中东等六十多个国家和地区。

建峰生产的吊装带采用高强度聚酯工业长丝(100%PES)为原料，加工工艺过程全部在ISO9001质量体系管理之下，其中扁平吊带、圆筒吊带、捆绑带三种产品相继通过了CE/GS和CCS认证。还可根据客户要求采用聚丙烯、超高分子量聚乙烯、进口迪尼玛等高强度材料制作各种吊装带，并申请 DNV、CCS、BV等船用产品检测签证服务。

JIAN FENG is a reliable manufacturer and supplier providing a range of products for your lifting and rigging needs. With its history of over 40 years JIAN FENG is famous for wire rope, wire ropeslings, synthetic slings, chain slings, rigging hardware and of course the comprehensive service by the brand name of JIANFENG.

Products have been exported to over 60 countries and areas in Europe, Australia, the Americas, Japan and Southeast Asia.

With our adherence to the most up-to-date technical know-how, high-quality materials, safety, user-comfort and economic efficiency, we are able to embrace every challenge in a multicultural world.

JIAN FENG's synthetic products are made entirely of polyester and the raw-material (100% PES yarn) is supplied from carefully chosen producers. The production of our synthetic products in our Guangzhou factory is in accordance with our quality management system (QMS) governed by ISO9001:2000. This is consistent with JIAN FENG's policy of producing high quality products with dedication to safety.

JIAN FENG's web sling, round sling and tie down products passed CE/GS certifications and are type approved by the Chinese Classification Society(CCS). We can conduct individual project manufacturing using materials such as polypropylene, UHMWPE or Dynee®. With our world-class testing facilities, we can provide DNV, CCS, BV product verification services.

供货概要 Product Program





扁平吊带	Web slings	width 25-320mm, WLL 0.25-50t
圆筒吊带	Round slings	WLL 1-2,000t
高强圆筒吊带	High-strength round slings	WLL 1-2,000t
吊带净带	Webbings	width 30-300mm, B/S 3.3-37t
捆绑带	Tie downs	width 25/35/50/75mm, B/S 0.25-10t
捆绑带净带	Tie down straps	width 25/35/50/75mm, B/S 0.65-12.1t
五金配件	Hardware	
拖车带	Tow straps	
安全带	Safety harnesses	

可按以下标准组织生产：Applicable standards: GB、EN、BS、DIN、AS、JIS、ASME、WSTDA



Leading the way to Success

建峰简介 About us	2
建峰吊装带产品优势 Advantages of JF synthetic products	4
资质证书 Certificates	6
吊装带生产 Manufacturing	8
研发中心 Research & development	10
检测中心 Testing Center	10
质量保证 Quality assurance	11
工程案例 Application cases	12
服务 General services	13
吊装系数与工作负荷 WLL table	14
扁平吊带 Web slings	16
圆筒吊带 Round slings	23
美式吊带 U.S. spec. slings	26
吊带配件 Sling accessories	29
捆绑带 Ratchet tie downs	30
五金配件 Ratchets, hooks, fittings	33
拖车带 Tow straps	43
安全带 Safety harnesses	44
卡车吊网 Truck Lifting Net	45
净带 Webbings, straps	46





以人才为核心竞争力，
以技术创新为理念，
打造卓越的质量，

制造客户放心的产品是
我们坚定的信念和不懈
的追求。

With our competent people,
And the implementation of our continuous development program,
We manufacture products of the highest quality.
These are all for the SAFETY and TRUST of our customers.



迅速反应的优质服务

建峰一直以其迅速反应能力享誉业界。

根据不同客户的需求，我们可以迅速提供可靠的吊装紧固方案，量身定造各种吊装索具产品。与客户同心协力，确保各种吊装紧固作业安全完成。

Prompt response service

JIAN FENG has built a reputation for providing prompt service whenever your needs arise. By working closely with customers and partners, we ensure that all lifting and securing projects are finished in a safe and proper way.

产品优势

- 最高质量和安全标准的吊装带产品
- 达到或超越国际相关产品标准
- 20年吊装带生产经验、近40多年吊装索具生产经验
- 通过不断改良、研发、重复测试，产品达到更高的安全和可靠水平
- 位于广州的全新一体化厂房专门生产吊带、捆绑带、安全带及五金配件
- 生产和质检流程全程按照 ISO 9001标准，确保原材料、净带、五金配件和成品的高质量
- 建立坚实的跨国策略伙伴关系，引进国外高效的生产方法、检测流程和产品技术
- 拥有行业内一流的检测中心，测试吨位达1,000T
- 提供拉力检测服务，可签发 DNV、CCS、BV等第三方检测证书
- 自家开发专利的织带染色技术
- 开发多项创新结构专利的吊带产品
- 合理的性价比
- 完整的建峰品牌系列产品
- 专业资格、经验丰富的吊装带技术专才
- 提供充足支持:从咨询、设计生产、至吊装
- 可靠的服务

Advantages of JF synthetic lifting & lashing products



- 100% quality and safe lifting and lashing products for your application.
- Testing regime to ensure products exceed the requirements of relevant product standards.
- 20 years experience manufacturing synthetic products; over 40 years experience manufacturing wire rope slings. Trust the experience.
- In-house design and product development, in-house manufacturing, and continuous improvement policy allow total quality control on the products, ensuring safety and customer satisfaction.
- Stable and long-term partnership with overseas lifting & rigging companies, brought in advanced production methods and product testing regimes.
- World class testing center, equipped with 1,000t horizontal tensile testing machine.
- In-house developed and patented webbing dyeing process, ensuring superior colorfastness and UV resistance.
- Fair price performance ratio.
- Very wide and complete product range.
- Competent consultation.
- Reliable service.



Advantages
of JF synthetic
products

我们的服务，您的安全！
Our Service, Your Safety！



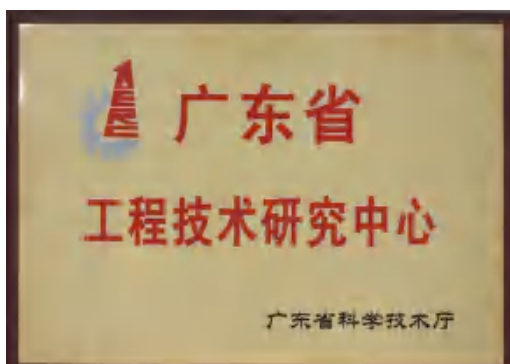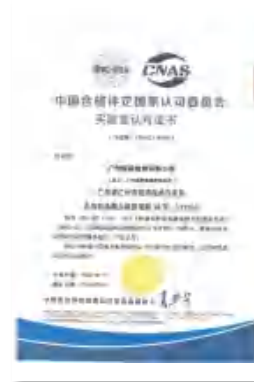



圆筒吊带制作
Round sling production



捆绑带车缝
Tie down production line



250T





我公司引进世界上最先进的织带机工作中
Advanced weaving machines for webbing production



五金配件生产
Hardware production

研发中心 Research & Development

公司由高素质专业技术人才组成的索具研发中心，具有丰富的研究开发经验，先后参与了交通部、国家文物局、广东省政府联合组织的“南海一号”打捞工程，中国海洋石油工程公司海油工程、天津新河造船股份有限公司绞吸式挖泥船工程、盐田国际集装箱码头有限公司防台风工程等诸多大型工程吊装索具、紧固索具设计开发。


For nearly 30 years, JIAN FENG has been committed to safety when it comes to lifting, transporting, and securing loads of all kinds. We use this professional experience to further our research and development, leading to an ever expanding product range. We aim to provide the best product for any particular lifting and rigging application.



检验中心 Testing Center

建峰检验中心积极贯彻 ISO 质量管理体系和计量管理保证体系，严格控制原材料入厂、生产制程及成品出货各个阶段的质量检测，保证出厂产品百分之百合格。

Jian Feng Testing Center carries out testing of materials, component parts and finished goods. This ensures that all products meet the high quality standards of JIAN FENG – an important guarantee for your safety.

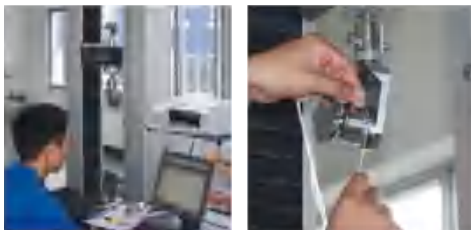

250T
圆筒吊带拉力测试



1000T 卧式拉力试验机

断裂测试：

纱线、净带、吊带、捆绑带

验证负荷测试：

净带、吊带、捆绑带

色牢度试验、抗UV测试：

净带

伸长率测试：

纱线、净带、吊带

金相分析、冲击试验：

金属材料

硬度测试：

五金配件

Breaking strength test:

Yarns, webbings, web slings, tie downs

Proof load test:

Webbings, web slings, tie downs

Colourfast test, UV degrading test:

Webbings

Elongation test:

Yarns, webbings, web slings, round slings

Spectrographic analysis, impact test:

Metal raw materials

Hardness test:

Hardware components

我们的服务，您的安全！
Our Service, Your Safety!

检测中心
Quality Control


质量控制点 Quality Control Points

为确保质量，提升品管效率，在生产工艺流程各主要工序中设立质量控制点，在制造的同时就做好品管，绝不让不良品流到下道工序。我们一直坚持产品的「质量」和「安全」。


The internal checks for quality are strict at JIAN FENG. Consistent spot check are taken from the ongoing production; no area (be it yarn, webbing, tie down strap, web sling, round sling or hardware components) is exempted.

吊带生产

Production workflow of web slings

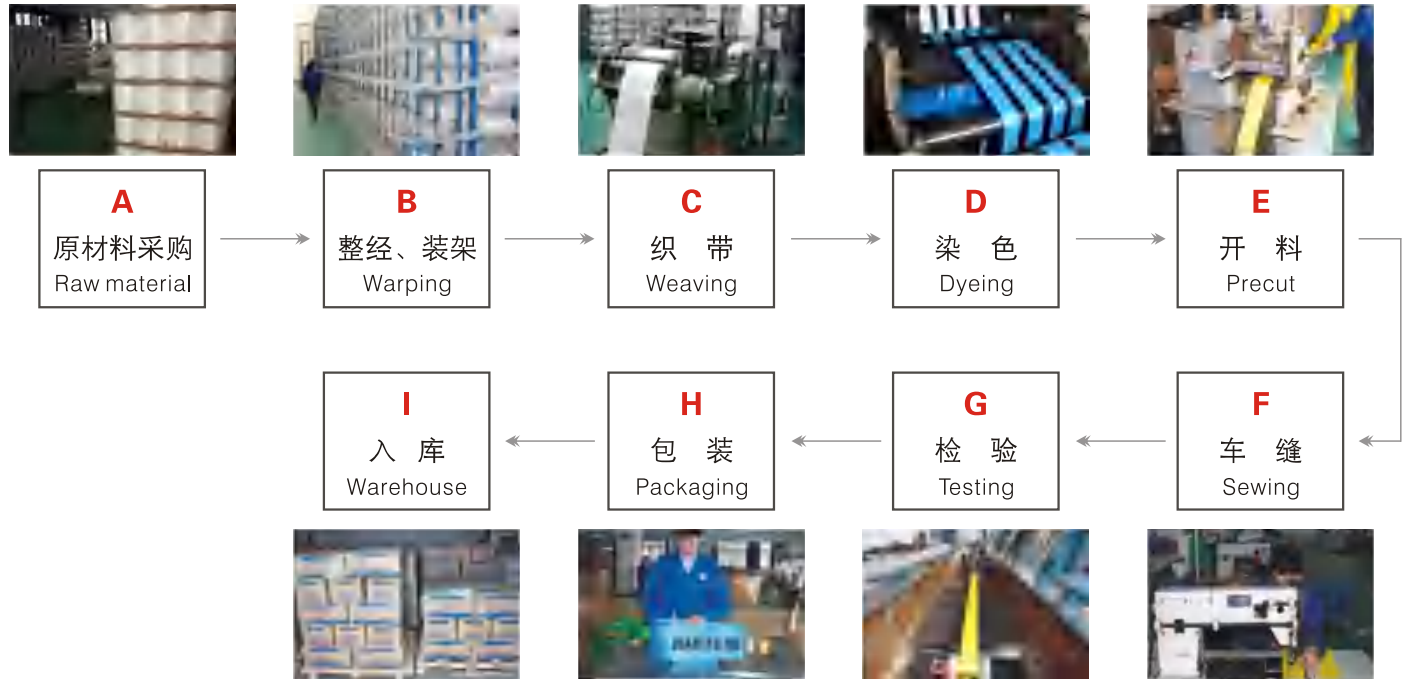

质量保证 Quality Assurance

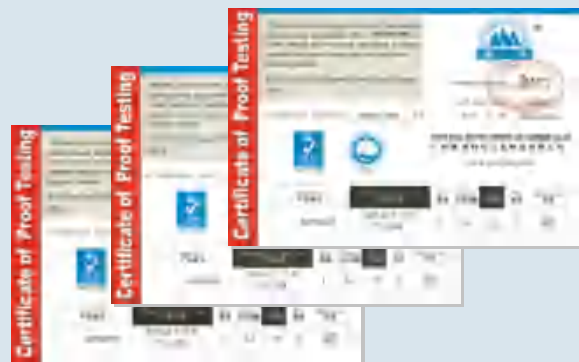


每批出厂的吊装带产品都会附有产品证书。
这是我们对产品质量的保证。
我们并可提供CCS、DNV、BV等第三方检测证书。

Test certificates are included with every shipment from JIAN FENG. These certificates are your assurance of unsurpassed quality. We can also provide DNV, CCS, BV product verification service.

工程案例
Application cases

海洋工程
Offshore oil & gas

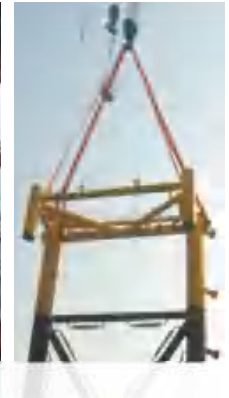


货仓物流
Material handling



船舶制造
Shipbuilding



电力工程
Power projects

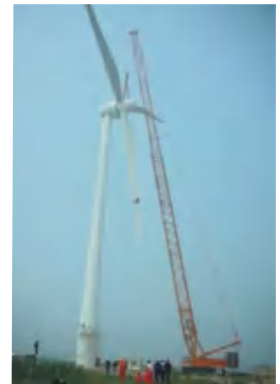

运输物流
Logistics




建筑工程
Construction



广州新电视塔
Guangzhou TV Tower



广交会琶洲展览中心
Pazhou Exhibition Centre, the venue of Canton Fair

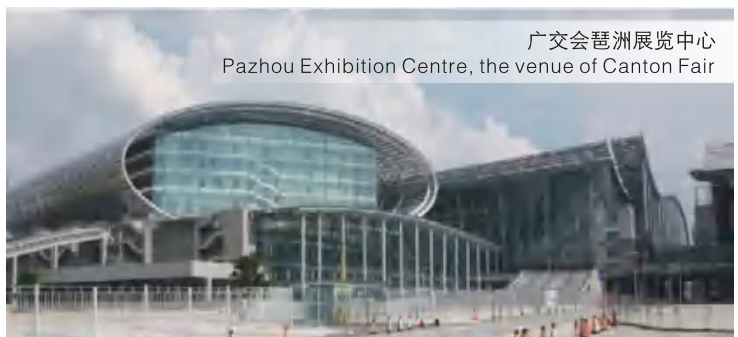

服务 General Services

合成纤维吊装带生产及供应商

作为具备十多年吊装带生产经验的专业厂家，我们生产多种类型、不同结构的高质量扁平吊带、圆筒吊带、捆绑带及配件等，直接供应各大用户。

产品

我们针对市场开发系统化的吊装带产品系列，确保产品能满足各种吊装或紧固使用的需要。

如果此产品书上找不到所需的产品规格，请通知我们。我们的工程师会按照您的使用要求设计及订制产品。

我们的产品全部按照国内和国际标准生产。

供货

我们自设织带生产线，有效控制生产资源配置，能达到较短的生产周期。

检测服务

吊装索具随着使用而耗损，正确的使用和维护可以避免吊装索具过早报废。

我们建议定期为吊装索具作检测，确保符合安全要求。

我们的检测中心具国家实验室认可，可提供吊装索具年检服务，并提供CCS、ABS、DNV、BV等船用产品检测签证服务。

培训服务

吊装作业方法不妥当可导致严重事故。

我们可以为您的吊装操作人员提供实际吊装方法及产品使用的培训。

技术支援

我们准备妥当，随时随地为您提供技术支持及咨询服务。

网站

您可在我们的网站找到所有吊装带的规格资料。

网址: www.jian-feng.com

Manufacturing and supplying

We develop, manufacture and market synthetic lifting and lashing products for customers with different requirements and needs. Our quality is highly regarded throughout the world and is fundamental to JIAN FENG's continual development.

Products

We have a wide range of products that enables us to deliver the parts necessary for your application.

Please ask us if you do not find a specific product in our catalogue. Our engineers will be happy to customize our products to perfectly fit your requirements and needs.

All our products are in accordance with the valid international standards.

Delivery

We make webbing in our own weaving mill. By optimizing the use of production resources we achieve relatively short leadtimes.

Testing service

Our world-class testing center is government certified. Equipped with South China's largest 1000t horizontal tensile testing machine, we can provide DNV, CCS, BV product verification service, and also yearly or periodic proof load testing service for lifting slings.

Inspection, repair and maintenance service

We would like to help you to maintain the operational readiness of your products and to extend their lifecycle through systematic maintenance. This saves you time and ensures that you will be on the safe side.

Training / specialized seminars

For the training of your staff we offer qualified seminars all around the topic of safe lifting and rigging practices.






































Technical customer service

We are happy to support and consult you on-site, at our plant or in your company.

Webpage

All technical data about synthetic slings, tie downs and accessories you will find as well online at www.jian-feng.com

JF | 吊装系数与工作负荷
Working load limits

	单根吊装工作最大负荷 Single leg slings W.L.L. (kg)				
					
圆筒吊带 Round slings 扁平吊带 Web slings 组合吊装 Slings with hardware components					
L = 吊装系数 Load factor	L=1.0	L=0.8	L=2.0	L=1.4	L=1.0
1,000kg 	1,000	800	2,000	1,400	1,000
2,000kg 	2,000	1,600	4,000	2,800	2,000
3,000kg 	3,000	2,400	6,000	4,200	3,000
4,000kg 	4,000	3,200	8,000	5,600	4,000
5,000kg 	5,000	4,000	10,000	7,000	5,000
6,000kg 	6,000	4,800	12,000	8,400	6,000
8,000kg 	8,000	6,400	16,000	11,200	8,000
10,000kg 	10,000	8,000	20,000	14,000	10,000
12,000kg 	12,000	9,600	24,000	16,800	12,000
15,000kg 	15,000	12,000	30,000	21,000	15,000
20,000kg 	20,000	16,000	40,000	28,000	20,000
25,000kg 	25,000	20,000	50,000	35,000	25,000
30,000kg 	30,000	24,000	60,000	42,000	30,000
40,000kg 	40,000	32,000	80,000	56,000	40,000
50,000kg 	50,000	40,000	100,000	70,000	50,000
60,000kg 	60,000	48,000	120,000	84,000	60,000
80,000kg 	80,000	64,000	160,000	112,000	80,000
100,000kg 	100,000	80,000	200,000	140,000	100,000
200,000kg 	200,000	160,000	400,000	280,000	200,000
300,000kg 	300,000	240,000	600,000	420,000	300,000
400,000kg 	400,000	320,000	800,000	560,000	400,000
500,000kg 	500,000	400,000	1,000,000	700,000	500,000
600,000kg 	600,000	480,000	1,200,000	840,000	600,000
700,000kg 	700,000	560,000	1,400,000	980,000	700,000
800,000kg 	800,000	640,000	1,600,000	1,120,000	800,000
900,000kg 	900,000	720,000	1,800,000	1,260,000	900,000
1,000,000kg 	1,000,000	800,000	2,000,000	1,400,000	1,000,000

		双根吊装工作最大载荷 Slings of 2 legs W.L.L. (kg)				四根吊装工作最大载荷 Slings of 4 legs W.L.L. (kg)	
		$90^\circ < \theta < 120^\circ$	$60^\circ < \theta < 90^\circ$	$45^\circ < \theta < 60^\circ$	$30^\circ < \theta < 45^\circ$	$7^\circ < \theta < 45^\circ$	$15^\circ < \theta < 60^\circ$
L=0.7	L=0.5	L=1.4	L=1.0	L=1.0	L=0.8	L=2.1	L=1.5
700	500	1,400	1,000	1,000	800	2,100	1,500
1,400	1,000	2,800	2,000	2,000	1,600	4,200	3,000
2,100	1,500	4,200	3,000	3,000	2,400	6,300	4,500
2,800	2,000	5,600	4,000	4,000	3,200	8,400	6,000
3,500	2,500	7,000	5,000	5,000	4,000	10,500	7,500
4,200	3,000	8,400	6,000	6,000	4,800	12,600	9,000
5,600	4,000	11,200	8,000	8,000	6,400	16,800	12,000
7,000	5,000	14,000	10,000	10,000	8,000	21,000	15,000
8,400	6,000	16,800	12,000	12,000	9,600	25,200	18,000
10,500	7,500	21,000	15,000	15,000	12,000	31,500	22,500
14,000	10,000	28,000	20,000	20,000	16,000	42,000	30,000
17,500	12,500	35,000	25,000	25,000	20,000	52,500	37,500
21,000	15,000	42,000	30,000	30,000	24,000	63,000	45,000
28,000	20,000	56,000	40,000	40,000	32,000		
35,000	25,000	70,000	50,000	50,000	40,000		
42,000	30,000	84,000	60,000	60,000	48,000		
56,000	40,000	112,000	80,000	80,000	64,000		
70,000	50,000	140,000	100,000	100,000	80,000		
140,000	100,000	280,000	200,000	200,000	160,000		
210,000	150,000	420,000	300,000	300,000	240,000		
280,000	200,000	560,000	400,000	400,000	320,000		
350,000	250,000	700,000	500,000	500,000	400,000		
420,000	300,000	840,000	600,000	600,000	480,000		
490,000	350,000	980,000	700,000	700,000	560,000		
560,000	400,000	1,120,000	800,000	800,000	640,000		
630,000	450,000	1,260,000	900,000	900,000	720,000		
700,000	500,000	1,400,000	1,000,000	1,000,000	800,000		

JF 扁平吊带环眼形式
Web sling eye types


● TYPE SE-01




● TYPE SE-02




● TYPE SE-03




● TYPE SE-04



● TYPE SE-05



● TYPE SE-06



SEE

单层扁平吊带

Single ply eye & eye flat web slings



材料：100% 高强涤纶工业长丝
安全系数：6:1 7:1 8:1
执行标准：国家标准：JB/T8521-2007
欧洲标准：EN1492-1:2000
澳洲标准：AS1353.1

Material : 100% high-strength polyester yarn
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-1:2000
Australian: AS1353.1


Code	工作负荷 W.L.L. tons	颜色 Colour	近似宽度 Approximate width			最小长度 Min. length m	最大长度 Max. length m
			6:1 mm	7:1 mm	8:1 mm		
SEE-0.5T	0.5		30	30	50	1.1	100
SEE-1T	1.0		50	60	65	1.2	100
SEE-1.5T	1.5		75	90	90	1.3	100
SEE-2T	2.0		100	120	120	1.4	100
SEE-2.5T	2.5		125	150	150	1.5	100
SEE-3T	3.0		150	180	200	1.7	100
SEE-4T	4.0		200	240	240	2.0	100
SEE-5T	5.0		250	300	-	2.2	100

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

DEE

双层扁平吊带

Double ply eye & eye flat web slings

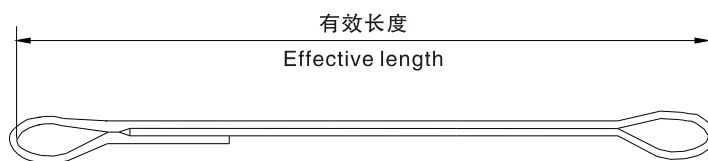

材料：100% 高强涤纶工业长丝
安全系数：6:1 7:1 8:1
执行标准：国家标准：JB/T8521-2007
欧洲标准：EN1492-1:2000
澳洲标准：AS1353.1

Material : 100% high-strength polyester yarn
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-1:2000
Australian: AS1353.1

Code	工作负荷	颜色	近似宽度			最小长度	最大长度
	W.L.L.		Approximate width			Min. length	Max. length
	tons		6:1 mm	7:1 mm	8:1 mm	m	m
DEE-1T	1.0		30	30	50	0.9	100
DEE-2T	2.0		50	60	65	1.0	100
DEE-3T	3.0		75	90	95	1.1	100
DEE-4T	4.0		100	120	120	1.3	100
DEE-5T	5.0		125	150	150	1.5	100
DEE-6T	6.0		150	180	200	1.6	100
DEE-8T	8.0		200	240	240	1.7	100
DEE-10T	10.0		250	300	-	2.0	100
DEE-12T	12.0		300	-	-	2.2	100

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

TEE

三层扁平吊带

Three ply eye & eye flat web slings



材料：100% 高强涤纶工业长丝
安全系数：6:1 7:1 8:1
执行标准：国家标准：JB/T8521-2007
欧洲标准：EN1492-1:2000
澳洲标准：AS1353.1

Material : 100% high-strength polyester yarn
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-1:2000
Australian: AS1353.1

Code	工作负荷	颜色	近似宽度			最小长度	最大长度
	W.L.L.		Approximate width			Min. length	Max. length
	tons		6:1 mm	7:1 mm	8:1 mm	m	m
TEE-1.5T	1.5		30	30	50	1.1	100
TEE-3T	3.0		50	60	65	1.2	100
TEE-4.5T	4.5		75	90	90	1.3	100
TEE-6T	6.0		100	120	120	1.5	100
TEE-7.5T	7.5		125	150	150	1.6	100
TEE-9T	9.0		150	180	200	1.7	100
TEE-12T	12.0		200	240	240	1.8	100
TEE-15T	15.0		250	300	-	1.8	100
TEE-18T	18.0		300	-	-	2.0	100

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

FEE

四层扁平吊带

Four ply eye & eye flat web slings



材 料：100% 高强涤纶工业长丝

安全系数：6:1 7:1 8:1

执行标准：国家标准：JB/T8521-2007

欧洲标准：EN1492-1:2000

澳洲标准：AS1353.1

Material : 100% high-strength polyester yarn

Safety Factor : 6:1 7:1 8:1

Standard : Chinese: JB/T8521-2007

European: EN1492-1:2000

Australian: AS1353.1

Code	工作负荷 W.L.L. tons	颜色 Colour	近似宽度 Approximate width			最小长度 Min. length m	最大长度 Max. length m
			6:1 mm	7:1 mm	8:1 mm		
FEE-2T	2.0		30	30	50	1.1	100
FEE-4T	4.0		50	60	65	1.3	100
FEE-6T	6.0		75	90	90	1.6	100
FEE-8T	8.0		100	120	120	1.7	100
FEE-10T	10.0		125	150	150	1.9	100
FEE-12T	12.0		150	180	200	2.0	100
FEE-16T	16.0		200	240	240	2.0	100
FEE-20T	20.0		250	300	-	2.2	100
FEE-24T	24.0		300	-	-	2.3	100

可按客户要求生产其他规格产品。

Other sizes can be produced upon request.

SES

单层环形扁平吊带

Single ply endless flat web slings



材料：100% 高强涤纶工业长丝
安全系数：6:1 7:1 8:1
执行标准：国家标准：JB/T8521-2007
欧洲标准：EN1492-1:2000
澳洲标准：AS1353.1

Material : 100% high-strength polyester yarn
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-1:2000
Australian: AS1353.1

Code	工作负荷 W.L.L. tons	颜色 Colour	近似宽度 Approximate width			最小长度 Min. length m	最大长度 Max. length m
			6:1 mm	7:1 mm	8:1 mm		
SES-1T	1.0		30	30	50	0.5	100
SES-2T	2.0		50	60	65	1.0	100
SES-3T	3.0		75	90	90	1.0	100
SES-4T	4.0		100	120	120	1.5	100
SES-5T	5.0		125	150	150	1.5	100
SES-6T	6.0		150	180	200	1.5	100
SES-8T	8.0		200	240	240	2.0	100
SES-10T	10.0		250	300	-	2.0	100
SES-12T	12.0		300	-	-	2.0	100

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

DES

双层环形扁平吊带

Double ply endless flat web slings



材料：100% 高强涤纶工业长丝

安全系数：6:1 7:1 8:1

执行标准：国家标准：JB/T8521-2007

欧洲标准：EN1492-1:2000

澳洲标准：AS1353.1

Material : 100% high-strength polyester yarn

Safety Factor : 6:1 7:1 8:1

Standard : Chinese: JB/T8521-2007

European: EN1492-1:2000

Australian: AS1353.1

Code	工作负荷 W.L.L.	颜色 Colour	近似宽度 Approximate width			最小长度 Min. length	最大长度 Max. length
			6:1 mm	7:1 mm	8:1 mm		
	tons					m	m
DES-2T	2.0		30	30	50	0.5	100
DES-4T	4.0		50	60	65	1.0	100
DES-6T	6.0		75	90	90	1.0	100
DES-8T	8.0		100	120	120	1.5	100
DES-10T	10.0		125	150	150	1.5	100
DES-12T	12.0		150	180	200	1.5	100
DES-16T	16.0		200	240	240	2.0	100
DES-20T	20.0		250	300	-	2.0	100
DES-24T	24.0		300	-	-	2.0	100


可按客户要求生产其他规格产品。

Other sizes can be produced upon request.

RES

环形圆筒吊带

Endless round slings

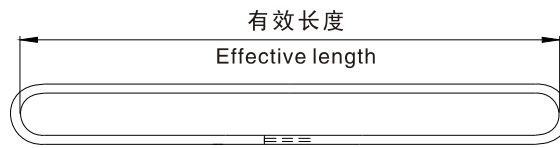

材 料：100% 高强涤纶工业长丝
安全系数：6:1 7:1 8:1
执行标准：国家标准：JB/T8521-2007
欧洲标准：EN1492-2:2000
澳洲标准：AS4497.1

Material : 100% high-strength polyester yarn
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-2:2000
Australian: AS4497.1

Code	工作负荷 W.L.L.	颜色 Colour	直径 Diameter	最小长度 Min. length	最大长度 Max. length
	tons		mm	m	m
RES-1T	1		19	0.5	80
RES-2T	2		25	0.5	80
RES-3T	3		28	0.5	80
RES-4T	4		32	0.5	80
RES-5T	5		36	0.5	80
RES-6T	6		38	1.0	80
RES-8T	8		43	1.0	80
RES-10T	10		48	2.0	80
RES-12T	12		53	2.0	80
RES-15T	15		60	2.0	80
RES-20T	20		70	2.0	80
RES-30T	30		86	2.0	80
RES-50T	50		119	2.0	80
RES-100T	100		140	2.0	80
RES-300T	300		280	2.0	80
RES-500T	500		350	2.5	80
RES-800T	800		426	2.5	80
RES-1000T	1000		476	3.0	80

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

REE

环眼圆筒吊带 Eye & eye round slings



材 料: 100% 高强涤纶工业长丝
安全系数: 6:1 7:1 8:1
执行标准: 国家标准: JB/T8521-2007
欧洲标准: EN1492-2:2000
澳洲标准: AS4497.1

Material : 100% high-strength polyester yarn
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-2:2000
Australian: AS4497.1


Code	工作负荷 W.L.L.	颜色 Colour	直径 Diameter	最小长度 Min. length	最大长度 Max. length
	tons		mm	m	m
REE-1T	1		30	1.0	80
REE-2T	2		40	1.1	80
REE-3T	3		45	1.2	80
REE-4T	4		52	1.3	80
REE-5T	5		58	1.5	80
REE-6T	6		61	1.6	80
REE-8T	8		69	1.7	80
REE-10T	10		76	2.0	80
REE-12T	12		85	2.0	80
REE-15T	15		96	2.0	80
REE-20T	20		112	2.5	80
REE-30T	30		138	2.5	80
REE-50T	50		192	2.5	80
REE-100T	100		200	3.0	80
REE-300T	300		450	4.0	80
REE-500T	500		500	4.0	80

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

RES-H

高强型圆筒吊带

High-strength round slings

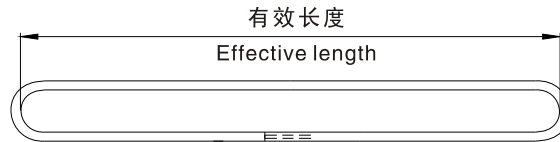

- 超高分子量聚乙烯纤维的强度是普通聚脂纤维的近四倍。
- UHMWPE fiber is up to 4 times stronger than regular polyester fiber.
- 重量轻，直径较小，便于使用。
- Easier handling due to lighter weight and bulk.

材 料：超高分子量聚乙烯 / 进口迪尼玛
安全系数：6:1 7:1 8:1
执行标准：国家标准：JB/T8521-2007
欧洲标准：EN1492-2:2000
澳洲标准：AS4497.1

Material : UHMWPE / Dyneema®
Safety Factor : 6:1 7:1 8:1
Standard : Chinese: JB/T8521-2007
European: EN1492-2:2000
Australian: AS4497.1

Code	工作负荷 W.L.L.	颜色 Colour	直径 Diameter	最小长度 Min. length	最大长度 Max. length
	tons		mm	m	m
RES-H-1T	1		14	0.5	80
RES-H-2T	2		18	0.5	80
RES-H-3T	3		21	0.5	80
RES-H-4T	4		24	0.5	80
RES-H-5T	5		27	0.5	80
RES-H-6T	6		29	1.0	80
RES-H-8T	8		32	1.0	80
RES-H-10T	10		36	2.0	80
RES-H-12T	12		39	2.0	80
RES-H-15T	15		44	2.0	80
RES-H-20T	20		52	2.0	80
RES-H-30T	30		64	2.0	80
RES-H-50T	50		84	2.0	80
RES-H-100T	100		120	2.0	80
RES-H-200T	200		140	2.0	80
RES-H-250T	250		175	2.0	80
RES-H-300T	300		196	2.0	80
RES-H-500T	500		245	2.5	80
RES-H-800T	800		298	2.5	80
RES-H-1000T	1000		332	3.0	80
RES-H-2000T	2000		470	3.0	80

可按客户要求生产其他规格产品。
Other sizes can be produced upon request.

Dyneema® is a registered trademark owned by Koninklijke DSM N.V.

EEA




美式扁平吊带

U.S. spec. eye & eye web slings



材料：100% 高强涤纶工业长丝
安全系数：5:1
执行标准：美国标准：ASME B30.9
WSTDA-WS1

Material : 100% high-strength polyester yarn
Safety Factor : 5:1
Standard : U.S.: ASME B30.9
WSTDA-WS1

Code	宽度 Width	层数 Ply	工作负荷 Rated capacity						环眼长度 Eye length	环眼宽度 Eye width
			吊装方式 Rigging technique			篮式吊装角度 Basket leg angle				
			 竖直 Vertical	 结套 Choker	 篮式 Basket	60°	45°	30°		
in.	lbs.						in.	in.		
EEA-1-1	1"	1	1,600	1,200	3,200	2,800	2,300	1,600	8"	1"
EEA-1-2		2	3,200	2,500	6,400	5,500	4,500	3,200	8"	1"
EEA-1-3		3	4,100	3,300	8,200	7,100	5,800	4,100	12"	1"
EEA-1-4		4	6,100	4,900	12,200	10,500	8,600	6,100	12"	1"
EEA-2-1	2"	1	3,200	2,500	6,400	5,500	4,500	3,200	10"	2"
EEA-2-2		2	6,400	5,000	12,800	11,100	9,000	6,400	10"	2"
EEA-2-3		3	8,200	6,600	16,500	14,300	11,600	8,200	12"	2"
EEA-2-4		4	12,200	9,800	24,400	21,100	17,200	12,200	12"	2"
EEA-3-1	3"	1	4,800	3,800	9,600	8,300	6,800	4,800	11"	1.5"
EEA-3-2		2	8,900	7,200	17,800	15,400	12,600	8,900	11"	1.5"
EEA-3-3		3	12,300	9,900	24,600	21,300	17,400	12,300	15"	1.5"
EEA-3-4		4	18,000	13,500	36,000	31,100	25,400	18,000	15"	1.5"
EEA-4-1	4"	1	6,400	5,000	12,800	11,100	9,000	6,400	12"	2"
EEA-4-2		2	12,000	9,600	24,000	20,800	17,000	12,000	12"	2"
EEA-4-3		3	15,300	12,200	30,600	26,500	21,600	15,300	16"	2"
EEA-4-4		4	24,000	18,000	48,000	41,500	33,900	24,000	16"	2"
EEA-5-1	5"	1	8,000	6,400	16,000	13,800	11,300	8,000	14"	1.75"
EEA-5-2		2	14,250	11,400	28,500	24,600	20,100	14,250	14"	1.75"
EEA-5-3		3	22,500	18,000	45,000	38,900	31,800	22,500	18"	2.5"
EEA-5-4		4	30,000	22,500	60,000	51,900	42,400	30,000	18"	2.5"
EEA-6-1	6"	1	9,600	7,600	19,200	16,600	13,600	9,600	16"	2"
EEA-6-2		2	18,000	14,500	36,000	31,100	25,400	18,000	16"	2"
EEA-6-3		3	23,000	18,400	46,000	39,800	32,500	23,000	18"	3"
EEA-6-4		4	36,000	24,000	72,000	62,300	50,900	36,000	18"	3"
EEA-8-1	8"	1	12,800	10,000	25,600	22,200	18,100	12,800	20"	3"
EEA-8-2		2	22,800	18,000	45,600	39,500	32,200	22,800	20"	3"
EEA-8-3		3	34,000	27,200	68,000	58,900	48,000	34,000	24"	4"
EEA-8-4		4	45,000	36,000	90,000	77,900	63,600	45,000	24"	4"
EEA-10-1	10"	1	16,000	12,800	32,000	27,700	22,600	16,000	24"	3.5"
EEA-10-2		2	28,000	22,500	56,000	48,500	39,500	28,000	24"	3.5"
EEA-10-3		3	36,000	28,500	72,000	62,300	50,900	36,000	24"	5"
EEA-10-4		4	55,000	44,000	110,000	95,200	77,700	55,000	24"	5"
EEA-12-1	12"	1	19,200	15,400	38,400	33,200	27,100	19,200	24"	4"
EEA-12-2		2	33,600	26,750	67,200	58,200	47,500	33,600	24"	4"
EEA-12-3		3	46,000	36,500	92,000	79,600	65,000	46,000	26"	6"
EEA-12-4		4	66,000	52,800	132,000	114,300	93,300	66,000	32"	6"

ESA

美式环形扁平吊带

U.S. spec. endless web slings



材料：100% 高强涤纶工业长丝
安全系数：5:1
执行标准：美国标准：ASME B30.9
WSTDA-WS1


Material : 100% high-strength polyester yarn
Safety Factor : 5:1
Standard : U.S.: ASME B30.9
WSTDA-WS1

Code	宽度 Width	层数 Ply	工作负荷 Rated capacity					
			吊装方式 Rigging technique			篮式吊装角度 Basket leg angle		
			竖直 Vertical	结套 Choker	篮式 Basket	60°	45°	30°
in.	lbs.							
ESA-1-1	1"	1	3,200	2,500	6,400	5,500	4,500	3,200
ESA-1-2		2	6,400	5,000	12,800	11,100	9,000	6,400
ESA-1-3		3	9,000	7,200	18,000	15,500	12,700	9,000
ESA-1-4		4	11,000	8,800	22,000	19,000	15,500	11,000
ESA-2-1	2"	1	6,400	5,000	12,800	11,100	9,000	6,400
ESA-2-2		2	12,800	10,200	25,600	22,200	18,100	12,800
ESA-2-3		3	16,500	13,200	33,000	28,500	23,300	16,500
ESA-2-4		4	22,000	17,600	43,900	38,000	31,000	22,000
ESA-3-1	3"	1	9,600	7,600	19,200	16,600	13,600	9,600
ESA-3-2		2	18,000	14,000	36,000	31,100	25,400	18,000
ESA-3-3		3	24,700	19,800	49,400	42,800	34,900	24,700
ESA-3-4		4	32,900	26,300	65,800	57,700	46,000	32,900
ESA-4-1	4"	1	12,800	10,200	25,600	22,200	18,100	12,800
ESA-4-2		2	24,000	18,000	48,000	41,500	33,900	24,000
ESA-4-3		3	34,400	27,500	68,800	59,500	48,600	34,400
ESA-4-4		4	40,800	32,600	81,500	70,600	57,000	40,800
ESA-5-1	5"	1	19,000	12,000	32,000	27,700	22,600	16,000
ESA-5-2		2	28,000	22,400	56,000	48,400	39,500	28,000
ESA-5-3		3	42,000	33,600	84,000	72,700	59,300	42,000
ESA-5-4		4	56,000	44,800	112,000	97,000	79,100	56,000
ESA-6-1	6"	1	19,200	15,300	38,400	33,200	27,100	19,200
ESA-6-2		2	32,600	26,100	65,300	56,500	46,200	32,600
ESA-6-3		3	45,900	36,700	91,700	79,400	64,900	45,900
ESA-6-4		4	61,200	48,900	122,300	105,900	86,500	61,200
ESA-8-1	8"	1	25,600	20,500	51,200	44,300	36,200	25,600
ESA-8-2		2	41,000	32,800	81,900	70,900	57,900	41,000
ESA-10-1	10"	1	32,000	25,600	64,000	55,400	45,200	32,000
ESA-10-2		2	48,000	38,000	96,000	83,100	67,900	48,000
ESA-12-1	12"	1	38,400	30,700	76,800	66,500	54,300	38,400
ESA-12-2		2	53,700	43,000	107,400	93,000	76,000	53,700

RES-A




美式圆筒吊带

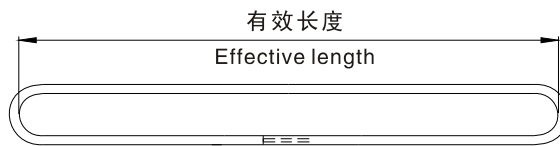U.S. spec. endless round slings



材料：100% 高强涤纶工业长丝
安全系数：5:1
执行标准：美国标准：ASME B30.9
WSTDA-WS1


Material : 100% high-strength polyester yarn
Safety Factor : 5:1
Standard : U.S.: ASME B30.9
WSTDA-WS1

Code	工作负荷 Rated capacity		
	吊装方式 Rigging technique		
	 竖直 Vertical	 结套 Choker	 篮式 Basket
	lbs.		
RES-A-1	2,600	2,100	5,200
RES-A-2	5,300	4,200	10,600
RES-A-3	8,400	6,700	16,800
RES-A-4	10,600	8,500	21,200
RES-A-5	13,200	10,600	26,400
RES-A-6	16,800	13,400	33,600
RES-A-7	21,200	17,000	42,400
RES-A-8	25,000	20,000	50,000
RES-A-9	31,000	24,800	62,000
RES-A-10	40,000	32,000	80,000
RES-A-11	53,000	42,400	106,000
RES-A-12	66,000	52,800	132,000
RES-A-13	90,000	72,000	180,000
RES-A-14	103,200	82,650	206,400

YNR

吊带连接件

Synthetic sling connector

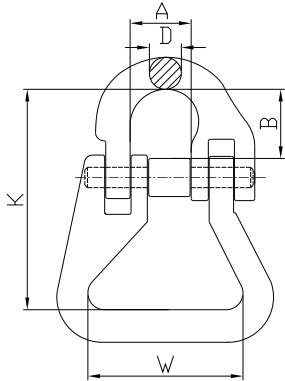


Code	链径 (毫米) Chain dia. (mm)	规格尺寸 (毫米) Dimensions (mm)					工作负荷 (吨) Working load (t)	重量 (公斤) Weight (kg)
		A	B	D	K	W		
YNR-6	6	15	17	Φ7	55	38	1.12	0.2
YNR-7,8	7,8	18	22	Φ9	62	40	2.0	0.3
YNR-10	10	18	26	Φ11	78	47	3.15	0.6
YNR-13	13	30	35	Φ16	95	53	5.3	1.0
YNR-16	16	36	38	Φ19	115	67	8.0	2.0
YNR-18,20	18,20	42	46	Φ22	132	80	12.5	3.0
YNR-22	22	49	49	Φ24	187	125	15.0	7.5
YNR-26	26	55	62	Φ30	209	150	21.2	11.6
YNR-32	32	69	79	Φ36	279	190	31.5	19.0

HKH

扁平吊带钩

Flat webbing choker




Code	规格尺寸 (毫米) Dimensions (mm)					工作负荷 (吨) Working load (t)	重量 (公斤) Weight (kg)
	K	P	W	T	H		
HKH-1T	103	135	77	150	325	1	0.8
HKH-2T	79	110	75	148	325	2	1.7
HKH-3T	55	98	58	100	230	3	2.3
HKH-5T	103	135	77	150	325	5	7.2

HRK

吊带自锁钩


Round sling self locking hook

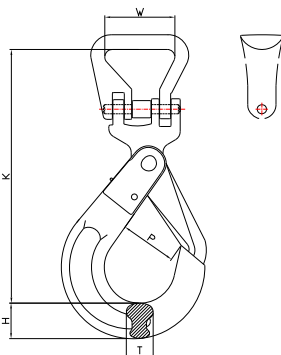

Code	链径 (毫米) Chain dia. (mm)	规格尺寸 (毫米) Dimensions (mm)					工作负荷 (吨) Working load (t)	重量 (公斤) Weight (kg)
		K	P	W	T	H		
HRK-6	6	138	29	38	15	19	1.12	0.6
HRK-7,8	7,8	169	34	40	20	24	2.0	1.0
HRK-10	10	196	44	47	26	30	3.15	1.9
HRK-13	13	253	52	53	30	39	5.3	3.7
HRK-16	16	305	60	67	36	49	8.0	6.8
HRK-18,20	18,20	328	90	80	48	62	12.5	11.0
HRK-22	22	416	80	125	49	63	15.0	17.0
HRK-26	26	459	99	150	56	69	21.2	25.0

RA25

RA25 捆绑带
RA25 ratchet tie downs

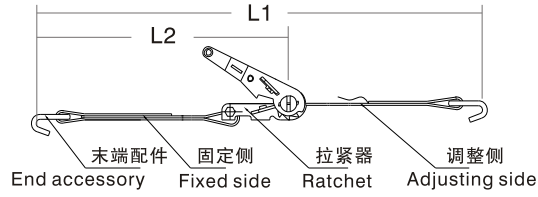

材料：100% 高强涤纶工业长丝
安全系数：2:1
执行标准：EN12195-2:2000


Material : 100% high-strength polyester yarn
Safety Factor : 2:1
Standard : EN12195-2:2000

Code	带宽 Width (mm)	破断负荷 Breaking load (kg)	固定侧长度 L2 Fixed side length (m)	常规尺寸 L1 Standard lengths L1 (m)
RA25-0.5T	25	500	0.3 / 0.5	6 / 8 / 10 / 12
RA25-0.8T	25	800	0.3 / 0.5	6 / 8 / 10 / 12
RA25-1T	25	1000	0.3 / 0.5	6 / 8 / 10 / 12
RA25-1.5T	25	1500	0.3 / 0.5	6 / 8 / 10 / 12

长度和配件可按客户要求订做。 Tie downs with other lengths and fittings can be produced upon request.

RA35

RA35 捆绑带
RA35 ratchet tie downs

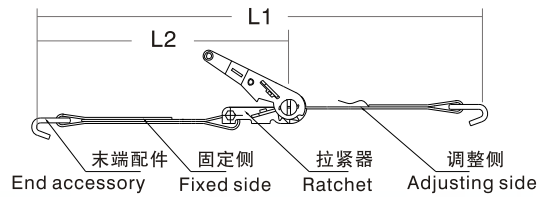


材料：100% 高强涤纶工业长丝
安全系数：2:1
执行标准：EN12195-2:2000

Material : 100% high-strength polyester yarn
Safety Factor : 2:1
Standard : EN12195-2:2000

Code	带宽 Width (mm)	破断负荷 Breaking load (kg)	固定侧长度 L2 Fixed side length (m)	常规尺寸 L1 Standard lengths L1 (m)
RA35-2T	35	2000	0.5	6 / 8 / 10 / 12
RA35-3T	35	3000	0.5	6 / 8 / 10 / 12

长度和配件可按客户要求订做。 Tie downs with other lengths and fittings can be produced upon request.

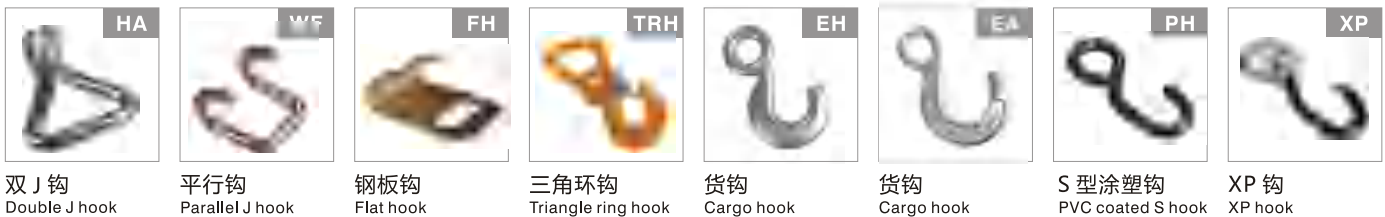

双J钩 Double J hook | 平行钩 Parallel J hook | 钢板钩 Flat hook | 三角环钩 Triangle ring hook | 货钩 Cargo hook | 货钩 Cargo hook | S型涂塑钩 PVC coated S hook | XP钩 XP hook

RA50


RA50 捆绑带

RA50 ratchet tie downs



RA50 - 5T - HA - 2

两端配件均为双 J 钩
Accessories at both ends are double J hooks
双 J 钩 Double J hooks
破断负荷 B/S: 5 tons
带宽 Width of strap: 50mm
捆绑带系列 Ratchet tie down assembly

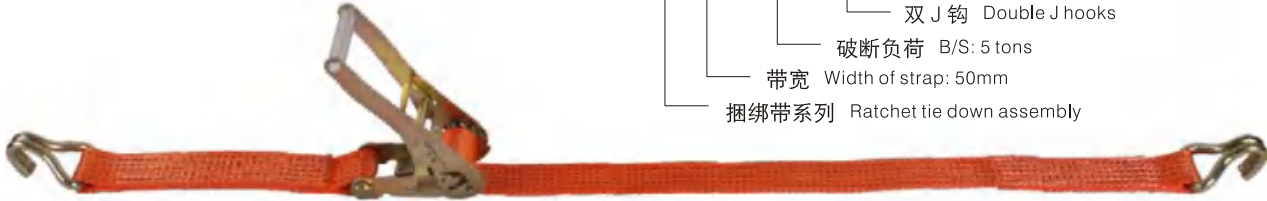

材料: 100% 高强涤纶工业长丝
安全系数: 2:1
执行标准: EN12195-2:2000

Material: 100% high-strength polyester yarn
Safety Factor: 2:1
Standard: EN12195-2:2000



Code	带宽 Width (mm)	破断负荷 Breaking load (kg)	固定侧长度 L2 Fixed side length (m)	常规尺寸 L1 Standard lengths L1 (m)
RA50-3T	50	3000	0.5	6 / 8 / 10 / 12
RA50-4T	50	4000	0.5	6 / 8 / 10 / 12
RA50-5T	50	5000	0.5	6 / 8 / 10 / 12

长度和配件可按客户要求订做。 Tie downs with other lengths and fittings can be produced upon request.

RA75

RA75 捆绑带

RA75 ratchet tie downs

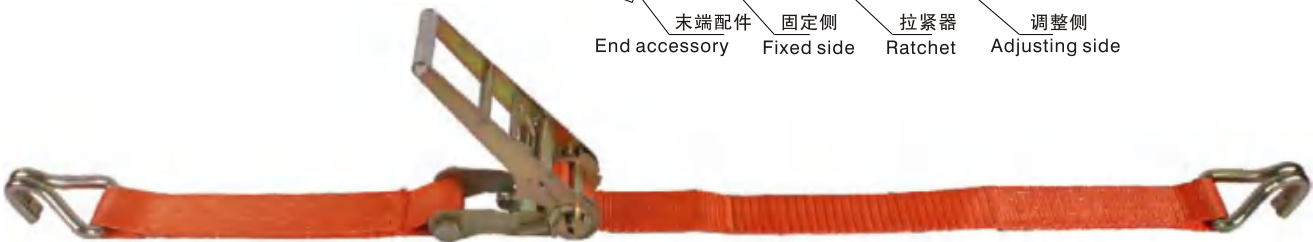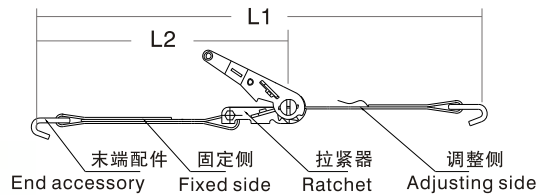

材料: 100% 高强涤纶工业长丝
安全系数: 2:1
执行标准: EN12195-2:2000

Material: 100% high-strength polyester yarn
Safety Factor: 2:1
Standard: EN12195-2:2000

Code	带宽 Width (mm)	破断负荷 Breaking load (kg)	固定侧长度 L2 Fixed side length (m)	常规尺寸 L1 Standard lengths L1 (m)
RA75-10T	75	10000	0.7	6 / 8 / 10 / 12

长度和配件可按客户要求订做。 Tie downs with other lengths and fittings can be produced upon request.



单 J 钩 Single J hook 平板钩 Snap hook 扭型钢板钩 Twisted snap hook 套筒单 J 钩 Single J hook 天鹅钩 Hook with D-ring FT 钩 FT hook D 形环 D-ring 梯形环 Trapezium ring

RL

一件式捆绑带

Endless ratchet tie downs



RL25-0.8T

1" 一件式捆绑带
1" Endless ratchet tie down



带宽 Band width: **25mm**
破断负荷 B/S: **800kg**

RL25-1T

RL25-1.5T

RL25-2T

1" 一件式捆绑带
1" Endless ratchet tie down



带宽 Band width: **25mm**
破断负荷 B/S: **1000kg / 1500kg / 2000kg**

RL35-2T

RL35-3T

1.5" 一件式捆绑带
1.5" Endless ratchet tie down



带宽 Band width: **35mm**
破断负荷 B/S: **2000kg / 3000kg**

RL50-3T

RL50-4T

RL50-5T

2" 一件式捆绑带
2" Endless ratchet tie down



带宽 Band width: **50mm**
破断负荷 B/S: **3000kg / 4000kg / 5000kg**

RL75-10T

3" 一件式捆绑带
3" Endless ratchet tie down



带宽 Band width: **75mm**
破断负荷 B/S: **10000kg**

安全系数 Safety factor 2:1

长度按客户要求 Length according to customer requirements.

BL

夹紧式捆绑带

Endless cam buckle tie downs

BL25-0.25T

BL25-0.5T

BL25-0.8T

BL25-1T

1" 夹紧式捆绑带
1" Endless cam buckle tie down



带宽 Band width: **25mm**
破断负荷 B/S: **250kg / 500kg / 800kg / 1000kg**

BL35-0.8T

1.5" 夹紧式捆绑带
1.5" Endless cam buckle tie down



带宽 Band width: **35mm**
破断负荷 B/S: **800kg / 1000kg**



安全系数 Safety factor 2:1

长度按客户要求 Length according to customer requirements.

RB

拉紧器

Ratchets

RB25-0.8T

1" 拉紧器

RB25K-0.8T

1" Ratchet




破断负荷 B/S: 800kg

RB25-1.5T

1" 拉紧器

1" Ratchet

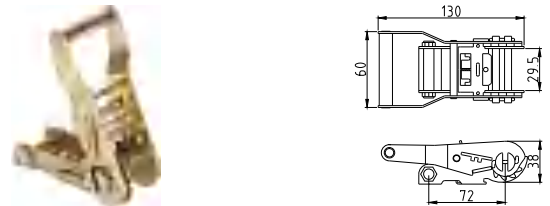

破断负荷 B/S: 1500kg

RB35-2T

1.5" 拉紧器

1.5" Ratchet




破断负荷 B/S: 2000kg

RB35-3T

1.5" 拉紧器

1.5" Ratchet

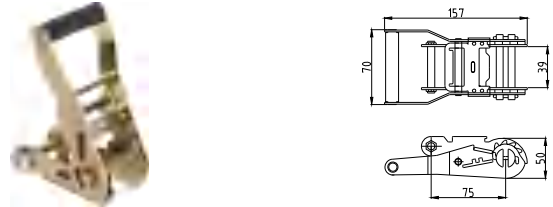


破断负荷 B/S: 3000kg

RB50A-5T

2" 拉紧器

2" Ratchet

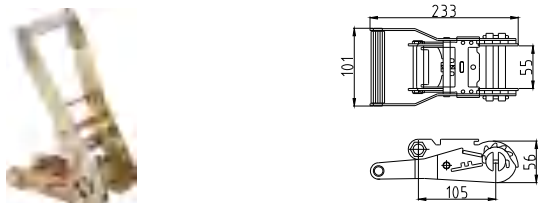


破断负荷 B/S: 5000kg

RB50B-5T

2" 拉紧器

2" Ratchet

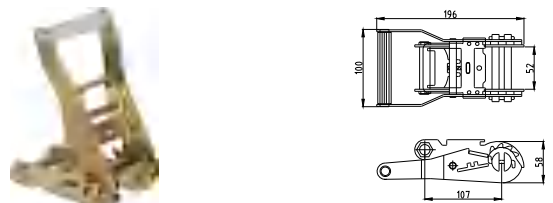


破断负荷 B/S: 5000kg

RB50C-5T

2" 拉紧器

2" Ratchet

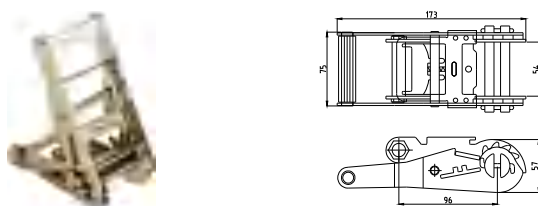


破断负荷 B/S: 5000kg

RB50D-6T

2" 拉紧器


2" Ratchet

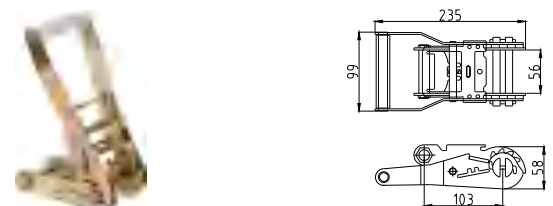

破断负荷 B/S: 6000kg

RB75-10T


3" 拉紧器
3" Ratchet



破断负荷 B/S: **10000kg**

RB100-10T


4" 拉紧器
4" Ratchet



破断负荷 B/S: **10000kg**

RC35


1.5" 拉紧器
1.5" Ratchet



破断负荷 B/S: **2500kg**

WF50

2" 拉紧器
2" Winch frame



破断负荷 B/S: **5000kg**


CB

夹紧器

Cam buckles

CB25-0.25T


1" 夹紧器
1" Cam buckle



破断负荷 B/S: **250kg**

CB25-0.5T


1" 夹紧器
1" Cam buckle



破断负荷 B/S: **500kg**

CB25-1T


1" 夹紧器
1" Cam buckle



破断负荷 B/S: **680kg**

CB25-1.1T


1" 夹紧器
1" Cam buckle



破断负荷 B/S: **1130kg**

CB35-0.8T


1.5" 夹紧器
1.5" Cam buckle



破断负荷 B/S: 800kg

CB50-1.1T


2" 夹紧器
2" Cam buckle



破断负荷 B/S: 1135kg

CB50-1.5T


2" 夹紧器
2" Cam buckle



破断负荷 B/S: 1130kg

CB50L-2.5T

2" 夹紧器
2" Cam buckle



破断负荷 B/S: 2500kg

FH


板钩

FS

Flat hooks / Snap hooks

FH50S-5T

2" 钢板钩
2" Flat hook




破断负荷 B/S: 5000kg

FH50-5T

2" 钢板钩

FH50K-5T

2" Flat hook



破断负荷 B/S: 5000kg


镀彩锌 / 黑色电泳
yellow zinc / black electroplated

FH75-7T

3" 钢板钩

FH75K-7T

3" Flat hook



破断负荷 B/S: 7000kg

镀彩锌 / 黑色电泳
yellow zinc / black electroplated


FH75-11T

3" 钢板钩

3" Flat hook

建峰专利


Patent no.2007300479182



破断负荷 B/S: 11000kg

FH100K-7T

4" 钢板钩
4" Flat hook




破断负荷 B/S: **7000kg**

黑色电泳
Black electroplated

FS25K-1.5T

1" 钢板钩
1" Snap hook




破断负荷 B/S: **1500kg**

黑色电泳
Black electroplated

FS50L-5T


2" 钢板钩
2" Snap hook



破断负荷 B/S: **5000kg**

FS50-3T


2" 钢板钩
2" Snap hook



破断负荷 B/S: **3000kg**

FS50-5T

2" 钢板钩
2" Snap hook




破断负荷 B/S: **5000kg**

FST

扭型板钩

Twisted snap hooks



Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)				
			A	B	D	H	L
FST35-3T	1.5	3000	39	$\Phi 5$	$\Phi 20$	99	130
FST50-3T	2	3000	46	$\Phi 4$	$\Phi 16$	106	135
FST50-5T	2	5000	51	$\Phi 6$	$\Phi 25$	116	157

钩

Hooks

EC 货钩
Cargo hook

破断负荷 B/S: **11000kg**

EA 货钩
Cargo hook

破断负荷 B/S: **11000kg**

EH 货钩
Cargo hook

破断负荷 B/S: **11000kg**

ET 拖车钩
Towing hook

破断负荷 B/S: **5000kg**

FE 梨形环钩
Pear ring hook

破断负荷 B/S: **7350kg**

TRHY 三角环钩
TRHC Triangle ring hook

破断负荷 B/S: **5000kg**

黄色 / 镀白锌
yellow painted / clear zinc

CA1 链条钩
Chain anchor

CA2 链条钩
Chain anchor

破断负荷 B/S: **7350kg** 破断负荷 B/S: **7350kg**

ES 1" 钩
1" Hook


破断负荷 B/S: **1000kg**

黑色喷涂
Black painted

HA

双J钩


Double J hooks



Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)					
			A	B	C	D	W	L
HA25-0.8T	1	800	26	Φ 10	22	Φ 6	15	47
HA25-1T	1	1000	26	Φ 14	25	Φ 6	20	47
HA25-1.5T	1	1500	26	Φ 20	31	Φ 8	26	52
HA25-2T	1	2000	26	Φ 10	23	Φ 8	16	54
HA35-3T	1.5	3000	38	Φ 15	32	Φ 9	28	75
HA50-3T	2	3000	51	Φ 21	35	Φ 10	27	82
HA50-4T	2	4000	51	Φ 18	34	Φ 11	26	82
HA50-5T	2	5000	51	Φ 20	37	Φ 12	26	83
HA50-6T	2	6000	51	Φ 22	42	Φ 12.5	31	96
HA75-7T	3	7000	78	Φ 22	51	Φ 13.5	43	134
HA75-10T	3	10000	78	Φ 22	52	Φ 17	39	134
HA100-10T	4	10000	102	Φ 22	52	Φ 17	39	136

HA50U


2" 套筒双J钩
2" Double J Hook



破断负荷 B/S: 3000kg

HA50P

2" 涂塑双J钩
2" Double J Hook




破断负荷 B/S: 4000kg

PVC 涂塑
PVC coated


HA35N

1.5" 双J钩
1.5" Double J hook



HA50N

2" 双J钩
2" Double J hook




破断负荷 B/S: 3000kg

破断负荷 B/S: 5000kg

HA50D

2" 天鹅钩
2" Hook with D-ring




破断负荷 B/S: 5000kg

SH

单 J 钩

FT


Single J hooks



Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)				
			A	B	C	D	L
SH25	1	800	28	Φ 20	34	Φ 9	76
SH35	1.5	3000	36	Φ 16	40	Φ 12	94
SH50	2	5000	51.8	Φ 20	49	Φ 15	130

SH35NU


1.5" 套简单 J 钩
1.5" Single J hook



破断负荷 B/S: 3000kg

SH35NB


1.5" 单 J 钩
1.5" Single J hook



破断负荷 B/S: 3000kg

SH35XU


1.5" 套简单 J 钩
1.5" Single J hook



破断负荷 B/S: 2000kg

SH35QP

1.5" 电泳单 J 钩
1.5" Single J hook



破断负荷 B/S: 3000kg



PVC 涂塑
PVC coated

FT-3T

FT 钩
FT hook

FT-5T

FT 钩
FT hook





破断负荷 B/S: 3000kg



破断负荷 B/S: 5000kg

S 钩

S hooks

PH-0.8T	S 型涂塑钩 PVC coated S hook	PH-1T	S 型涂塑钩 PVC coated S hook
 <p>PVC 涂塑 PVC coated</p>			
破断负荷 B/S: 800kg		破断负荷 B/S: 1000kg	


PS	S 钩 S Hook
	
	
破断负荷 B/S: 400kg	

XP	XP 钩 XP hook
	
	
破断负荷 B/S: 800kg	

WF

平行钩

Parallel hooks

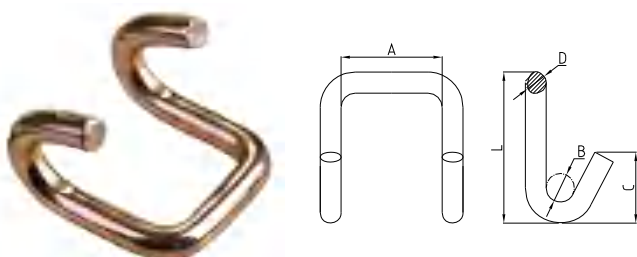

WF25	1" 平行钩 1" Parallel hook
	
	
破断负荷 B/S: 1000kg	

Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)				
			A	B	C	D	L
WF35-2T	1.5	2000	38	Φ 16	32	Φ 8.5	52
WF35-3T	1.5	3000	38	Φ 15	30	Φ 9.5	60
WF50-5T	2	5000	52	Φ 15	31	Φ 11.5	60
WF75-10T	3	10000	79	Φ 20	53	Φ 17	92


TR | 三角环
Triangle rings



焊接
welded



锻造
forged



Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)			
			A	B	D	
TR50F	2	5000	53	49	Φ 10	锻造 forged
TR50W-3T	2	3000	51	45	Φ 8.5	焊接 welded
TR50W-5T	2	5000	59	55	Φ 12	焊接 welded
TR75W	3	8000	78	70	Φ 15	焊接 welded

TR75A | 3" 三角环
3" Triangle ring

破断负荷 B/S: **7350Kg**

TR100A | 4" 三角环
4" Triangle ring

破断负荷 B/S: **9000kg**

ZR | 梯形环
Trapezium ring

破断负荷 B/S: **10,000lbs. / 4538kg**


OR | O形环
O-Rings



镀白锌
clear zinc




镀彩锌
yellow zinc



Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)		表面处理 Finish
			B	D	
OR35-2T	1.5	2000	40	Φ 8	镀白锌 clear zinc
OR50-2.5T	2	2500	51.5	Φ 10	镀彩锌 yellow zinc

DR

D 形环 D-Rings



Code	名义尺寸 (英寸) Nominal size (in.)	破断负荷 (公斤) Breaking load (kg)	规格尺寸 (毫米) Dimensions (mm)		
			A	B	D
DR35-3T	1.5	3000	42	36	Φ 9
DR50-3T	2	3000	53	39	Φ 10
DR50-5T	2	5000	53	44	Φ 12
DR75-8T	3	8000	79	58	Φ 15


拴绳器

Bolt plate with ring

QPR

方拴绳器

Square bolt plate with ring




破断负荷 B/S: **5000lbs. / 2723kg**

CPR

圆拴绳器

Circular bolt plate with ring



破断负荷 B/S: **1200lbs. / 545kg**

TSH

拖车带

Tow strap with hooks



Code	长度 Length	破断负荷 Breaking load (kg)
TSH	4m	5,000

TSF

扁平拖车带

Flat tow strap



- 高品质、耐用的聚酯拖车带。
- 环眼护套增加耐用性。

- High-strength heavy duty tow strap made of 100% PES.
- Reinforced eyes to resist wear and tear.

Code	长度 Length	破断负荷 Breaking load (kg)
TSF	3m	10,000

TSR

圆筒拖车带

Round towing sling



- 特别为拖拉陷于泥沼车辆而设计的拖车带。
- 内置松紧带。
- 用纱线作为承载芯；化纤外套增加耐用性。

- Specifically designed to recover vehicles when bogged.
- Built-in retention cord.
- The sling has polyester load bearing fiber and polyester outer sleeve for extra durability.

Code	长度 Length	破断负荷 Breaking load (kg)
TSR	4m	12,000

TLN

绞车带

Winch strap



Code	名义尺寸	破断负荷		工作负荷		长度
	Nominal size	Breaking load		W.L.L.		Lengths
	in.	lbs.	kg	lbs.	kg	ft.
WS50	2"	10,000	4,545	3,333	1,515	27' / 30'
WS75	3"	13,000	5,909	4,333	1,969	27' / 30'
WS100	4"	15,000	6,818	5,000	2,272	27' / 30'



FH 钢板钩
Flat hook



DR D形环
D-Rings



FE 梨形环钩
Pear ring hook



CA 链条钩
Chain anchor



ZR 梯形环
Trapezium ring



HA 双J钩
Double J hooks

JH

安全带

Safety harnesses

JH-B1



- 轻便舒适
- 背部连接点
- 前端两个连接点
- 可调节腿部、肩部及胸部带的松紧

- Lightweight and comfortable
- Rear attachment point
- Front attachment points
- Fully adjustable leg, shoulder and chest straps

执行标准:

澳大利亚标准: AS/NZS 1891:2007

Standard :

Australian: AS/NZS 1891:2007



安全带 750kg 载荷测试
Proof load testing to 750kg.

TLN

卡车吊网

Truck Lifting Net

- 用100%高强涤纶工业长丝制作
- 中心区加强
- 执行标准：AS1353.1-1997
- 长度：按客户要求定制

- High-strength heavy duty Truck Lifting Net made of 100% polyester.
- Reinforcement in the center
- Manufactured to AS1353.1-1997
- Lengths in Meters: Customized according to customer requirements

LIFTING MODE X W.L.L	1	0	U	60°	90°	120°
	1	0.8	2	1.7	1.4	1



WB

吊带净带

Webbing



Code	安全系数 Safety factor	带宽 Width (mm)	破断负荷 Breaking load (kg)	颜色 Colour
WB30-6	6:1	30	3,300	
WB30-7	7:1	30	3,850	
WB50-8	8:1	50	4,400	
WB50-6	6:1	50	6,600	
WB60-7	7:1	60	7,700	
WB65-8	8:1	65	8,800	
WB75-6	6:1	75	9,900	
WB90-7	7:1	90	11,550	
WB90-8	8:1	90	13,200	
WB100-6	6:1	100	13,200	
WB120-7	7:1	120	15,400	
WB120-8	8:1	120	17,600	
WB125-6	6:1	125	16,500	
WB150-7	7:1	150	19,250	
WB150-8	8:1	150	22,000	
WB150-6	6:1	150	19,800	
WB180-7	7:1	180	23,100	
WB200-8	8:1	200	26,400	
WB200-6	6:1	200	26,400	
WB240-7	7:1	240	30,800	
WB240-8	8:1	240	34,000	
WB250-6	6:1	250	32,000	
WB300-7	7:1	300	37,000	

WL

捆绑带净带

Tie down straps



Code	带宽 Width (mm)	破断负荷 Breaking load (kg)	颜色 Colour			
WL25-0.5T	25	650				
WL25-0.8T	25	1,000				
WL25-1T	25	1,200				
WL25-1.5T	25	1,700				
WL35-2T	35	2,100				
WL35-3T-A	35	3,300				
WL35-3T-B	35	4,500				
WL50-3T	50	3,300				
WL50-4T-A	50	4,600				
WL50-4T-B	50	5,200				
WL50-4T-C	50	6,200				
WL50-5T-A	50	5,400				
WL50-5T-B	50	6,400				
WL50-5T-C	50	7,500				
WL75-10T	75	11,000				
WL75-11T	75	12,100				



建峰索具有限公司
Jian Feng Sling Co., Ltd

地址：广州市经济技术开发区永和区永顺大道贤堂路18号
邮编：511356

国内销售 电话：020 3222 2868
传真：020 3222 2166

国际销售 电话：+86 20 3222 2170
传真：+86 20 3222 2053

Address: No.18 Xiantang Road, Yongshun Dadao,
Yonghe District, Guangzhou Economic
and Technological Development Zone,
Guangzhou, Guangdong, China 511356

Tel : +86 20 3222 2170
Fax : +86 20 3222 2053

Email: info@jian-feng.com
www.jian-feng.com



装带
SYNTHETIC FIBER SLINGS

绑带
TIE DOWNS

金配件
HARDWARE

JIAN FENG

SYNTHETIC LIFTING AND LASHING

建峰吊装带

